





PLC



GTW732 Mini PLC Gateway
An industrial smart gateway with
power line communication
Edge-Computing ability

Features

- BroadComm BCM2837 CPU
- 4 cores Cortex-A53
- 512 Bytes RAM · Support max.32GB eMMC
- Built-in GPS/GNSS
- 4G Support NB-IOT/Cat-M
- / Wi-Fi b/g/n & Ethernet RJ45
- 1x 1GB LAN
- IP54
- 1x PLC module, support 100x PLC controllers connection.
- Working temp. -40°C - 60°C
- PC housing
- Hi-trust reliability · 24*7 hours continuously operation.
- Built-in battery, make sure inner clock works.
- 3 years warranty
- Support DIN · wall mount · pole clamp installation.
- Linux operation system / Web maintenance page.
- Open API, support MQTT · CoAP · TCP · HTTP protocol
- EMC : EN 50065-1 · EN 55022 · EN 55024 · EN 61000-3-2 · EN 61000-3-3 · EN 61000-6-2和EN 61000-6-4 FCC part 15B
- Safety : IEC-61347/IEC-63730
- RoHS

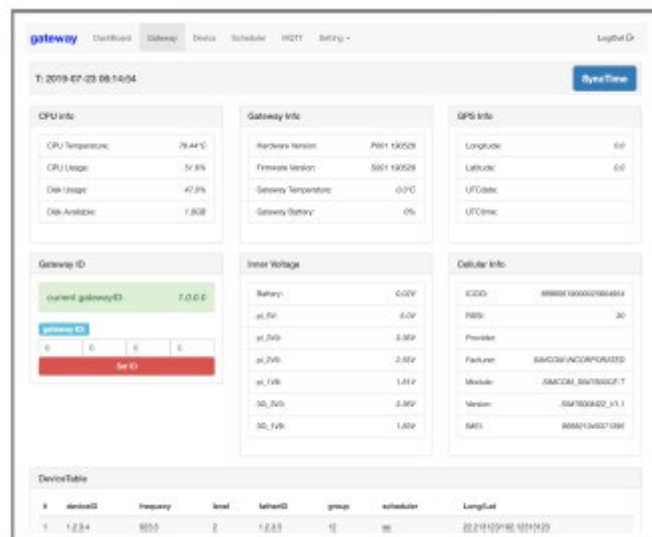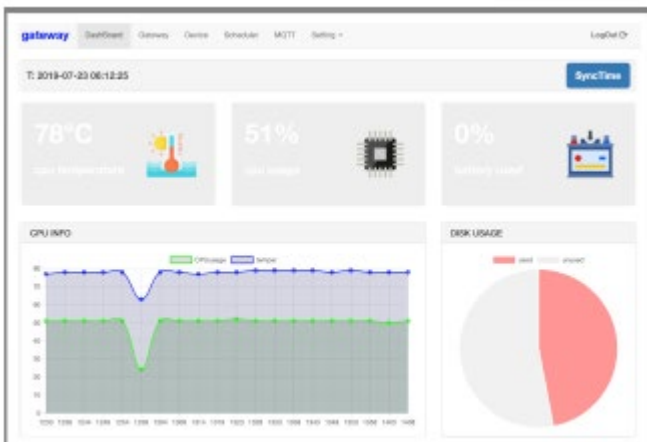

- Technical Parameters:

	Functions
Input voltage	3-phases/ single phase AC100V-240V/ 380V
Self consumption	3.5W
Powerline carrier	10KHz ~ 500KHz, Max. 1 PLC modules
Case	PC
Cooling method	Passive, non FAN cooling
Weight	0.32kg
MTBF	> 200,000 hours
Working Temp.	-40° to 60° C
Relays	N/A
DIO	N/A
Analog Input	N/A
Analog output	N/A
USB	N/A
RS485	N/A
DC output	N/A
Internet	RJ45 x1 · 10/100/1000M NBIOT/Cat-M module with standard SIM slot.