




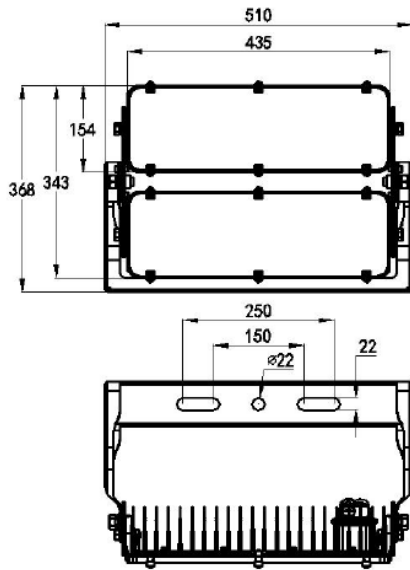
EVO2000 AS-Series

Asymmetrical Twins


600W~960W
145 lm/w
Marine Grade

LED driver outside
Smart control available

Specification					
Model	EVO2600AS	EVO2700AS	EVO2800AS	EVO2900AS	EVO2960AS
Rated Watts	600W	700W	800W	900W	960W
Range	560W~600W	660W~700W	760W~800W	840W~900W	920~960W
LED Chips	OSRAM 				
CRI	≥70 (Cool White), >=80 (Natural & Warm White), >=90 (optional)				
Total Luminous flux (Cool white)	≥87,000 lm ≥ 145 lm/w	≥101,500 lm ≥ 145 lm/w	≥116,000 lm ≥ 145 lm/w	≥130,500 lm ≥ 145 lm/w	≥139,200 lm ≥ 145 lm/w
Driver	MeanWell HLG-320-C x2 Constant current		MeanWell HLG-480-C x2 Constant current		
AC Input	AC 90~305V				
Dimming	1-10V				
Operation Temp.	-40°C~55°C, indoors and outdoors				
IP rating	IP66				
Beam Angle	Asymmetrical, PC Lens				
Color Temp.	5000K~5700K(CW)/4000K(NW)/ 2700K~3000K(WW)				
Dimensions	510x468x332mm (include bracket)		510x463x394mm (include bracket)		
Weight	24.3 Kg		27.8 Kg		
Material	Die-cast Aluminum Heat-Sink, Grey painting UV Cut PC Lens/ Tempered proof cover Stainless 304 Bracket Straight and 40° Tilt bracket (Optional)				
Industrial Certificate	1000+hrs Salty-Spray (ASTM B117) testing passed IK08				
Smart Controlling	Neutroni ECO-Link: Zigbee/DALI Neutroni PowerLink: LoRa/NBIOT/LTE/PLC (Power Line Communication)				
Warranty	5 Years, Life Span>=50,000 hrs				
COO	Made in Taiwan				
Certification	CE/CNS/ROHS				



EVO2600AS
EVO2700AS
EVO2800AS

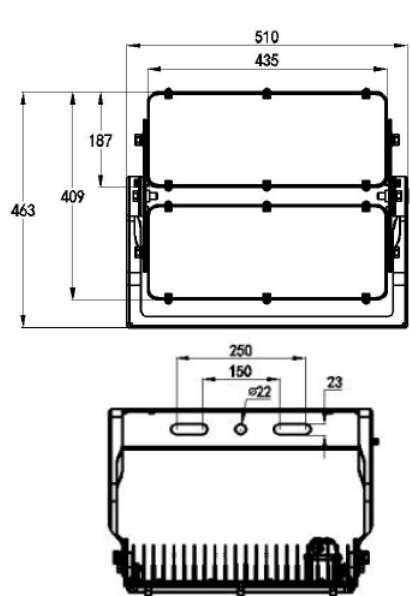

EVO2900AS
EVO2960AS

Optical Distribution 54°

