



EVO2000 AS-Series

非對稱雙燈


600W~960W

145 lm/w


電源外置
支援智能控制

規格

規格					
型號	EVO2600AS	EVO2700AS	EVO2800AS	EVO2900AS	EVO2960AS
額定功率	600W	700W	800W	900W	960W
功率範圍	560W~600W	660W~700W	760W~800W	840W~900W	920~960W
LED晶片	OSRAM 				
CRI	≥70 (Cool White), ≥80 (Natural & Warm White), ≥90 (optional)				
總光通量/效率 (白光)	≥87,000 lm ≥ 145 lm/w	≥101,500 lm ≥ 145 lm/w	≥116,000 lm ≥ 145 lm/w	≥130,500 lm ≥ 145 lm/w	≥139,200 lm ≥ 145 lm/w
LED電源	MeanWell HLG-320-C x2 Constant current		MeanWell HLG-480-C x2 Constant current		
AC輸入	AC 100-277V AC 90~305V(明緯)				
調光	0-10V/1-10V				
工作溫度	-40°C~55°C, indoors and outdoors				
IP等級	IP66				
出光角	Asymmetrical, PC Lens				
色溫	5000K~5700K(CW)/4000K(NW)/ 2700K~3000K(WW)				
尺寸	510x468x332mm (含支架)		510x463x394mm (含支架)		
重量	24.3 Kg		27.8 Kg		
材質	Die-cast Aluminum Heat-Sink, Grey painting UV Cut PC Lens/ Tempered proof cover Stainless 304 Bracket Straight and 40° Tilt bracket (Optional)				
工業等級	1000+hrs Salty-Spray (ASTM B117) testing passed IK08				
智能控制	Neutroni ECO-Link: Zigbee/DALI Neutroni PowerLink: LoRa/NBIOT/LTE/PLC (Power Line Communication)				
產地	Made in Taiwan				
認證	CE/CNS/ROHS				

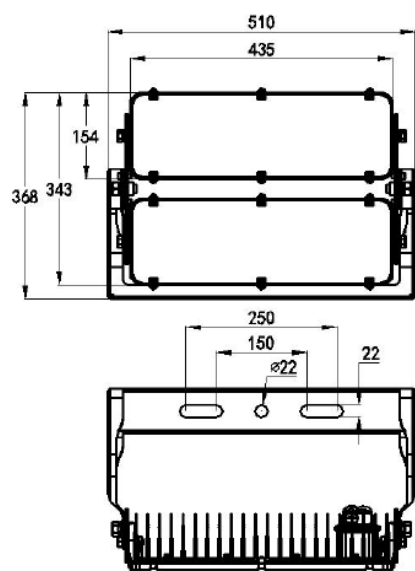

EVO2600AS
EVO2700AS
EVO2800AS

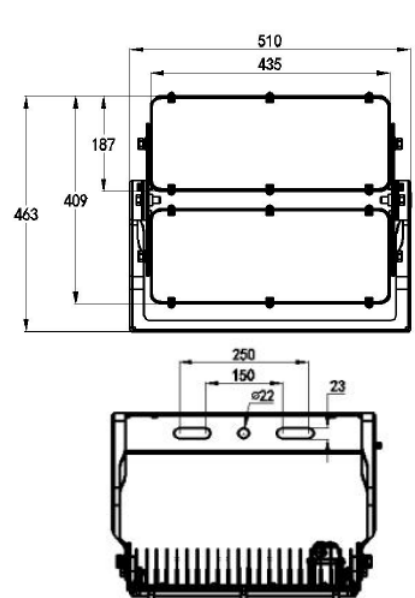

EVO2900AS
EVO2960AS

Optical Distribution 54°

