


Best Valuable Product

Neotroni ECO1000 105W Mini Standard Flood Light



Premium Efficacy

System Efficacy $\geq 132\text{lm/w}$, output lumens up to 14,000lm



Under driver design, longer durability

192pcs OSRAM High CRI LED Chips, increase 20% efficacy

Uncomfortable glare?

Over 6 times size illumination area, eliminate high glare problem.



Keep away low quality product!

Too much light emitted from small size COB LED chip will generate extreme high glare and impact your visual. ECO1000 mini 105W use 192pcs Emitter LED, just like a panel is able to low down 60% glare and more comfortable

Pure White, lesser blue color, and higher CRI.

5000K CCT is the purest white color, and $\geq 80\text{CRI}$ let ambient more vivid.



70 CRI

80 CRI

Not only brighter, and more brilliant.

Gentle and soft lighting has benefit to visual and spirit. High CRI is a world trend in indoors application which let your environment more colorful.


ECO1000 105W

Mini Standard Flood Light



World top class, OSRAM Power Inside

Neutroni cooperates with OSRAM to introduce Euro-Top class LED Power, which built-in 6KV surge protection.

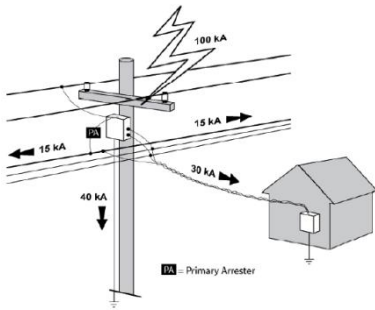

Against electricity surge is more and more important

Due to unstable electricity source and frequent lightning strike, dangerous surge will increase the possibility of system impact, especially in factory or public electricity in outdoors. OSRAM LED Power is built-in 6KV surge arrestor to against the damage source.

Light Weight, Multiple function

2.8Kg includes LED power, Stainless bracket with stop screws, IP66 Rating, suitable for indoors and outdoors

Application:



Factory



Mall, Car Park




Warehouse



Exhibition & Conference Hall

100% Made in Taiwan, 5 Years full function warranty
CE/CNS certification, best quality and 100% made in Taiwan is the best you can trust.

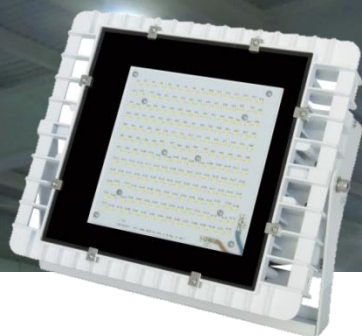

Now you can have it

	ECO1000 Mini 105W Standard Flood Light
Model No.	ECO1105CS- <u>X</u> W*
Rated Wattage	105W±5%
LED Chips	OSRAM LED Chips (or Philips Lumileds)
Ra(CRI)	≥80
LED Nos.	192 pcs
System Efficacy (Include all loss)	≥13,650 lm ≥130 lm/w
LED Power	Meanwell LED Driver
AC input	110~277V
Dimming	N/A
Working Temp.	-40°C~50°C
IP Rating	IP66
Beam Angle	120°
CCT	5000K
Dimensions	220x220x82mm
Net Weight	2.8kg
Material/Finished	Die-Casting Aluminum/All Black Tempered proof glass, IK08 Stainless steel bracket with 2 stop screws
Surge Protection	Built-in 6KV
Warranty	5 Years
COO	Made in Taiwan
Certificate	CNS 14335 Safety (IEC 60598 regulation) CNS14115 Magnetic emission CNS15697 Photo-Bio safety regulation CE

Neutroni reserve the right of product modification
Listed values are tested by TAF Lab organization



Manufacturer
Neutroni Lighting Inc.
www.neutroni.com

For more product information, please visit our web
site & Facebook