






EVO2000 AS-Series

非對稱光型
300W~480W
達145 lm/w




電源外置型
支援智能燈光控制

規格

規格					
型號	EVO2300AS	EVO2350AS	EVO2400AS	EVO2450AS	EVO2480AS
額定功率	300W	350W	400W	450W	480W
功率範圍	280W~320W	330W~350W	380W~400W	420W~450W	460~480W
LED晶片	OSRAM 				
CRI	≥70 (Cool White), ≥80 (Natural & Warm White), ≥90 (optional)				
總光通量/效率 (白光)	≥43,500 lm ≥ 145 lm/w	≥50,750 lm ≥ 145 lm/w	≥58,000 lm ≥ 145 lm/w	≥65,250 lm ≥ 145 lm/w	≥69,600 lm ≥ 145 lm/w
LED電源	MeanWell HLG-320-C 或同等級定電流電流		MeanWell HLG-480-C 或同等級定電流電源		
AC輸入	AC 100-277V AC 90~305V(明緯)				
調光	0-10V或1-10V				
工作溫度	-40°C~55°C, indoors and outdoors				
IP等級	IP66				
出光角	非對稱				
色溫	5000K~5700K(CW)/4000K(NW)/ 2700K~3000K(WW)				
尺寸	479x220x224mm (含支架)		479x228x224mm (含支架)		
重量	11.5 Kg		13.1 Kg		
材質	Die-cast Aluminum Heat-Sink, Grey painting UV Cut PC Lens/ Tempered proof cover Stainless 304 Bracket Straight and 40° Tilt bracket (Optional) 60mm				
工業等級	1000+hrs Salty-Spray (ASTM B117) testing passed IK08				
智能控制	Neutroni ECO-Link: Zigbee/DALI Neutroni PowerLink: LoRa/NBIOT/LTE/PLC (Power Line Communication)				
產地	Made in Taiwan				
認證	CE/CNS/ROHS				

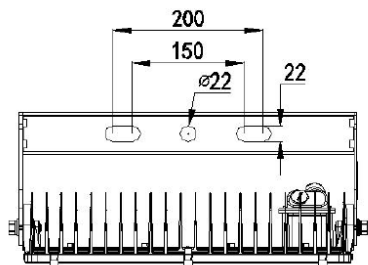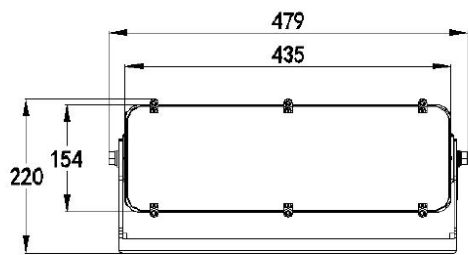

EVO2300AS
EVO2350AS
EVO2400AS

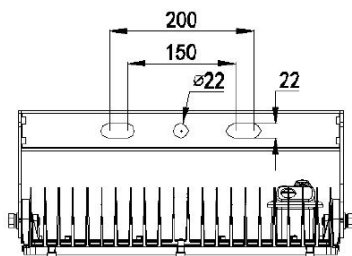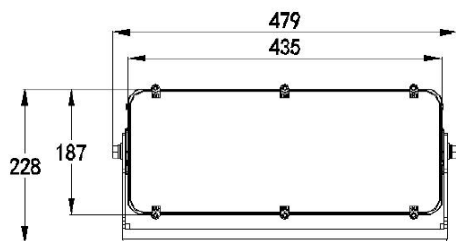

EVO2450AS
EVO2480AS

Optical Distribution 54°

